


SML

EXTRUSION LINES – ENGINEERED TO PERFORM ▶

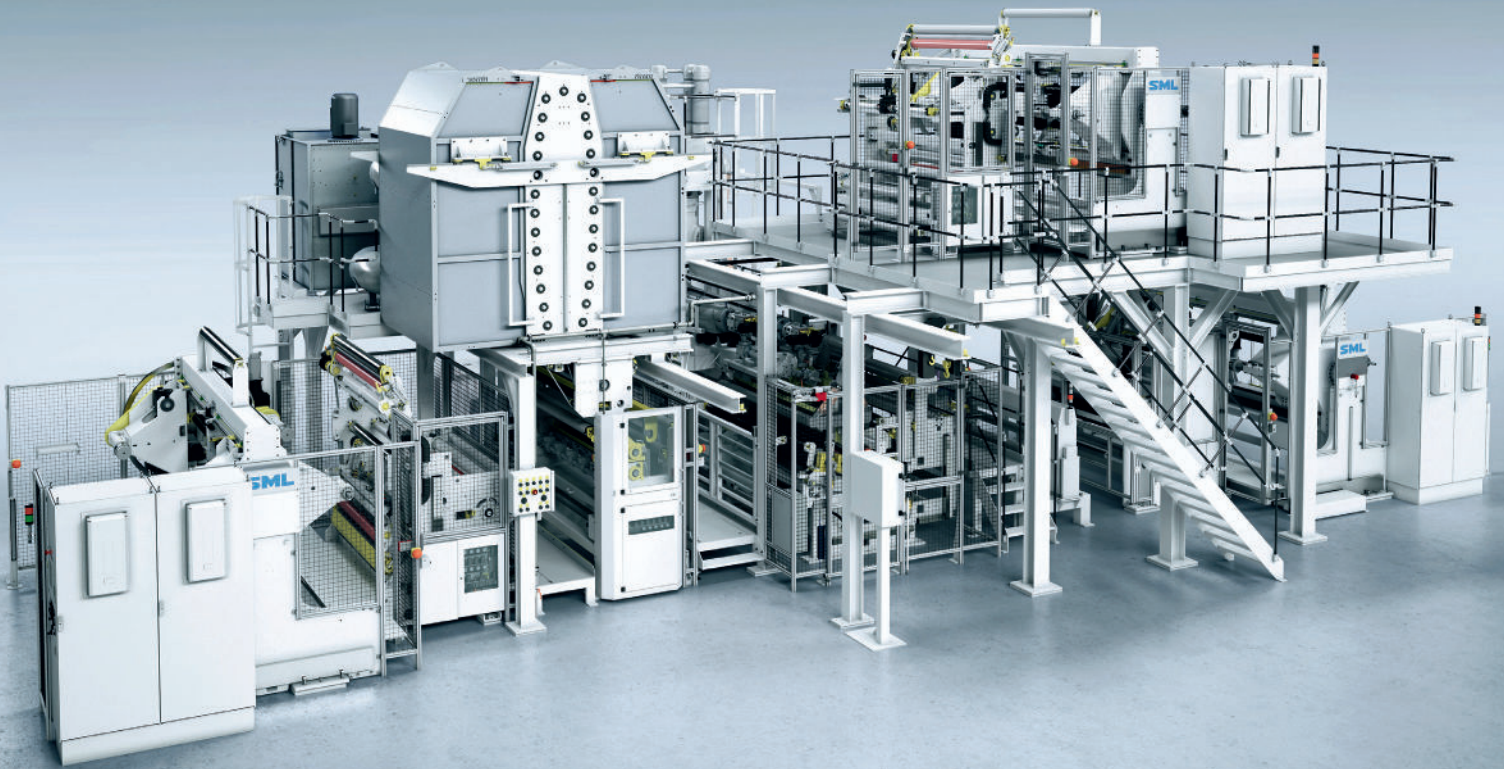


FlexPack®

EXTRUSION
LAMINATION LINE

The new **FlexPack®** extrusion lamination line is capable of producing a wide variety of structures for different applications.

Key Features:

- low space requirement
- good accessibility
- high quality components
- best cost performance ratio
- easy operation

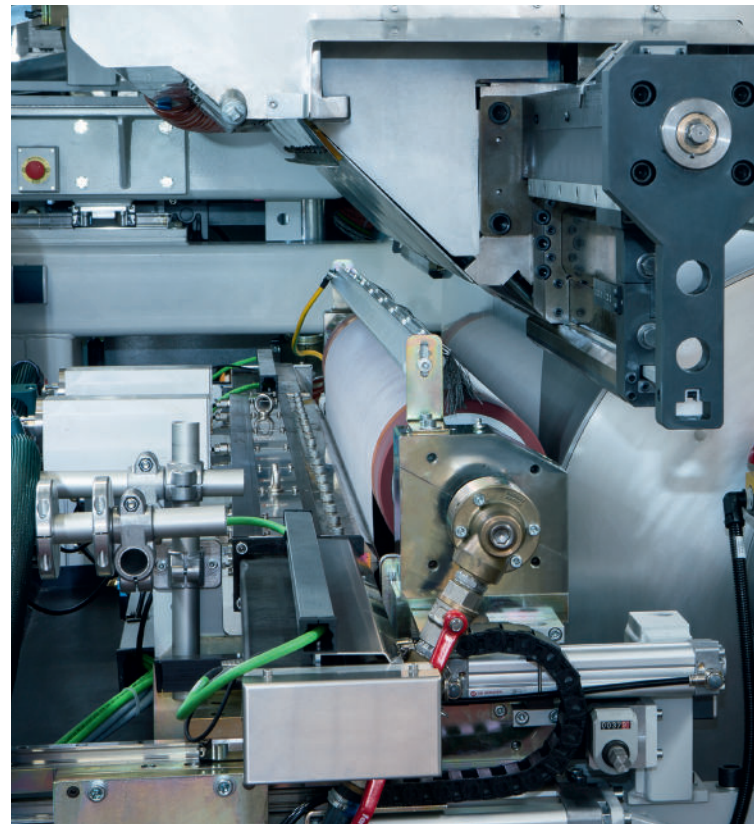

Substrates	BOPP film, BOPET film, PA film, paper, aluminium foil, metallized film, barrier film, nonwovens, etc.
Extrusion materials	LDPE, PP, EAA, EMA, EVA, IONOMERS...
Coating weight	8 – 50 g/sqm (depending on product)

Types	FlexPack® 1500	FlexPack® 1800
Product width	700 – 1,350mm	800 – 1,650mm
Max. mech. line speed	350 m/min	350 m/min
Max. mech. line speed, shaftless	450 m/min	450 m/min


EXTRUSION:


- Extruder carriage with floor-level trackwork and 3 axis motorized movement
- Fully integrated extruder mounted gravimetric batch dosing system (maximal 6 components each extruder)
- Extruder A: Ø 90/33 L/D
Extruder B: Ø 60/33 L/D
third extruder optional
- Melt filter and melt pressure regulation valve
- 3-layer feedblock with variable geometry (optional 5 layers)
- T-die with internal decking and edge bead reduction system
- Inline die splitter for easy die cleaning

COATING UNIT:

- Chill roll, Ø 800mm
- Rubberized pressing roll, Ø 200mm
- Steel supporting roll, Ø 250mm
- Separate cooling circuits for chill roll and pressing unit
- Quick change equipment for rollers
- Stripper roll at chill roll outlet
- Electrical adjustable teflon belt attachment

FlexPack®
DEMONSTRATION LINE

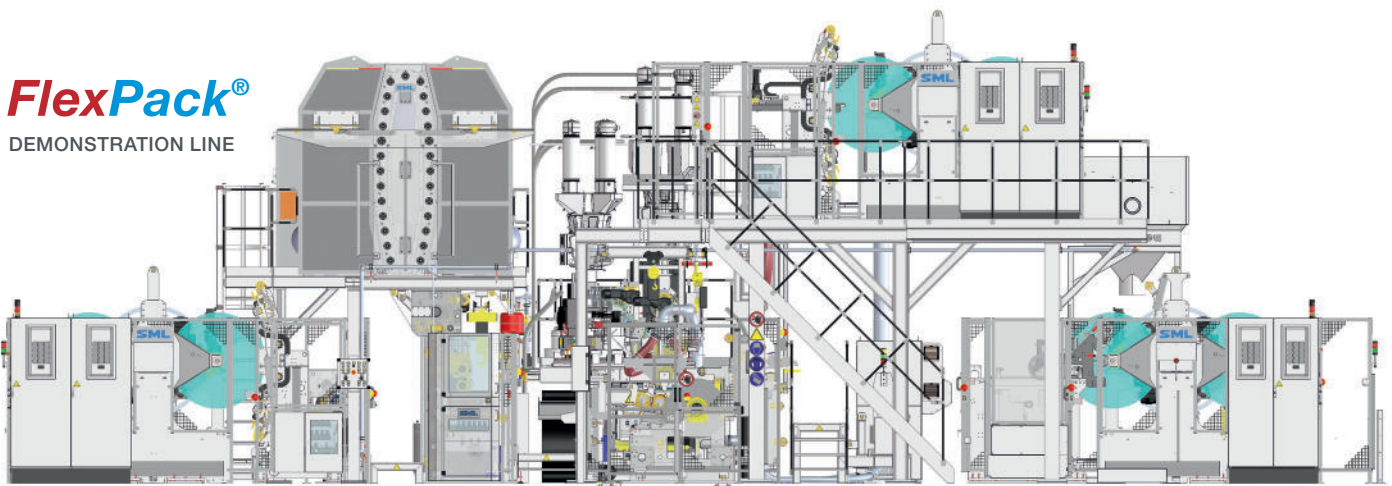

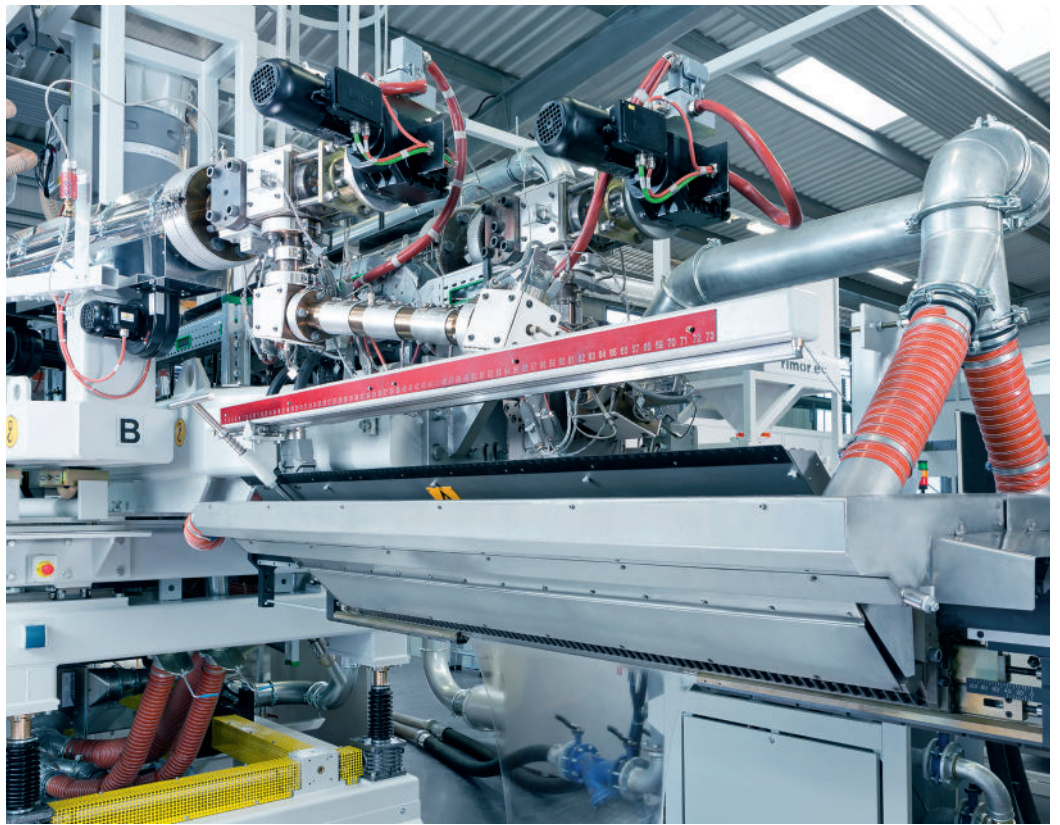

UNWINDING UNIT(S):

- Fully automatic turret unwinds
- Both unwinding directions possible
- Max. substrate diameter 1,200mm, (1,270mm)
- Web tension, 30 - 600N
- Integrated edge guiding system
- Constant gap device for unwinding of thin foil
- Shafted or shaftless core clamping available

HOTMELT COATING MODULE (OPTIONAL):

- Hotmelt lamination or "DoubleCoat" process (patent pending)
- Hotmelt tank melter
- Drum melter optional
- Flat die with motorised decking system

OZONE TREATMENT (OPTIONAL):

- Ozone generator
- Applicators for both side treatment of melt curtain

PRIMER UNIT (OPTIONAL):

- Closed chamber doctor blade system for direct gravur coating
- Waterbased primers
- High efficiency hot air drying system with vertical dryer 2 x 2.5m
- Quick change for sleeve type rubber pressing roll
- Sleeve technology optional available

CORONA TREATMENT(S):

- Driven ceramic treatment roll with rubberised pressing roll
- Ceramic electrodes for treatment of conductive and non-conductive substrates

THICKNESS MEASURING UNIT(S):

- Frame with beta sensor (other sensors optional)
- APC control optional

EDGE TRIM HANDLING:

- Shear cut circular knife system with driven counter knife
- Edge trim suction system with blower, venturi tube and sound absorber

WINDER:

- Fully automatic turret winder W1500
- Both winding directions possible
- Max. winding diameter 1,200mm (1,270mm)
- Winding tension 50 - 750N
- Pull roll unit to separate web tension from winding tension
- Contact and gap winding mode
- Shafted or shaftless core clamping available

FIELD OF APPLICATIONS:

- Flexible packaging
- Coated papers
- Technical applications (insulation, packing material,...)

IN COMBINATION WITH PATENT PENDING „DOUBLECOAT“ PROCESS:

- Breathable roofing membrane
- Products for hygienic applications (patient drapes, surgery coverings)
- Medical applications (patient drapes,...)
- Breathable textiles
- Protective wear

SML

EXTRUSION LINES – ENGINEERED TO PERFORM ►

SML - Head Office

Bundesstrasse 1a
A-4860 Lenzing, Austria
Phone: +43-7672-912-0
Fax: +43-7672-912-9
E-mail: sml@sml.at
www.sml.at

SML - Machinery Far East Sdn Bhd

(1029958-P)
1201 Block B, Menara Amcorp
No.18 Jalan Persiaran Barat
46050 Petaling Jaya
Selangor Darul Ehsan,
Selangor, Malaysia
Phone: +60-3-7955-9098
Fax: +60-3-7955-9981
E-mail: yen@sml.at

SML - Moscow Office

Ogorodny proezd, 5
Building 6, office 504
127254 Moscow
Russia
Phone: +7 495 618 8007
Fax: +7 495 619 5961
E-mail: kna@sml.at

SML - Beijing Office

Unit 1410, Landmark Tower
No. 8 North Dongsanhuan Road
Chaoyang District
100004 Beijing, P.R. of China
Phone: +86-10-6590-0946
Fax: +86-10-6590-0949
E-mail: sml@sml.bj.cn

100%
eXtrusion
COATING LINES

ANALYSES | DEVELOPMENT

PRE-TESTED PERFORMANCE | DELIVERY ON TIME

SERVICE SUPPORT | CUSTOMER SATISFACTION

www.sml.at